


RMC-1

Motor Control Dry Contact Station

The RMC-1 (Motor Control Dry Contact Station) is a specialized peripheral driver designed to provide precise ON/OFF control for terminal equipment within the Green-X Greenhouse Control System (GCS-1) ecosystem. Equipped with two internal relays, RMC-1 provides a dry-contact output only; it functions solely as an isolated switch with a contact rating of 1A.

The RMC-1 allows for manual and automated management of external circuits, facilitating functions such as forward rotation, reverse rotation, and stopping of motors. RMC-1 also supports the integration of a maximum of two Position Switches (TPS-1).



Specifications

RMC-1

Power Input

Input Voltage12V $\overline{\text{---}}$ 0.1A

Package Dimensions

Size5.51inch / 140mm(L) x 3.54inch / 90mm(W) x 1.97inch / 50mm(H)
Gross Weight0.49lbs / 0.22kg

Dry Contact Rating

Dry Contact1A@250VAC, 1A@30VDC

Operating Environments

Temperature32~104°F (0~40°C)
Humidity≤90%RH


Package Contents

RMC-1	1pc
0.5ft RJ12 Cable	1pc
4ft RJ12 Cable	1pc
2EDGKNH-3.5mm_2x3P	1pc
LC89+LZ4R-3.5mm_2x3P	1pc


Link Up

RMC-1

Connection Diagram

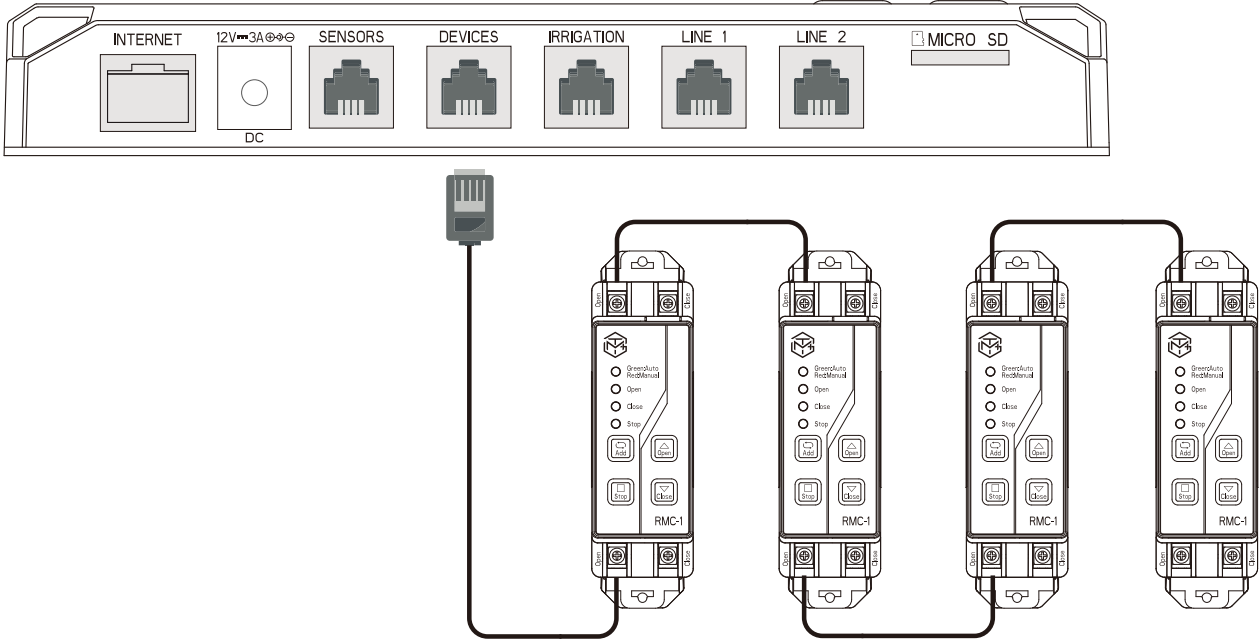

Product Dimensions

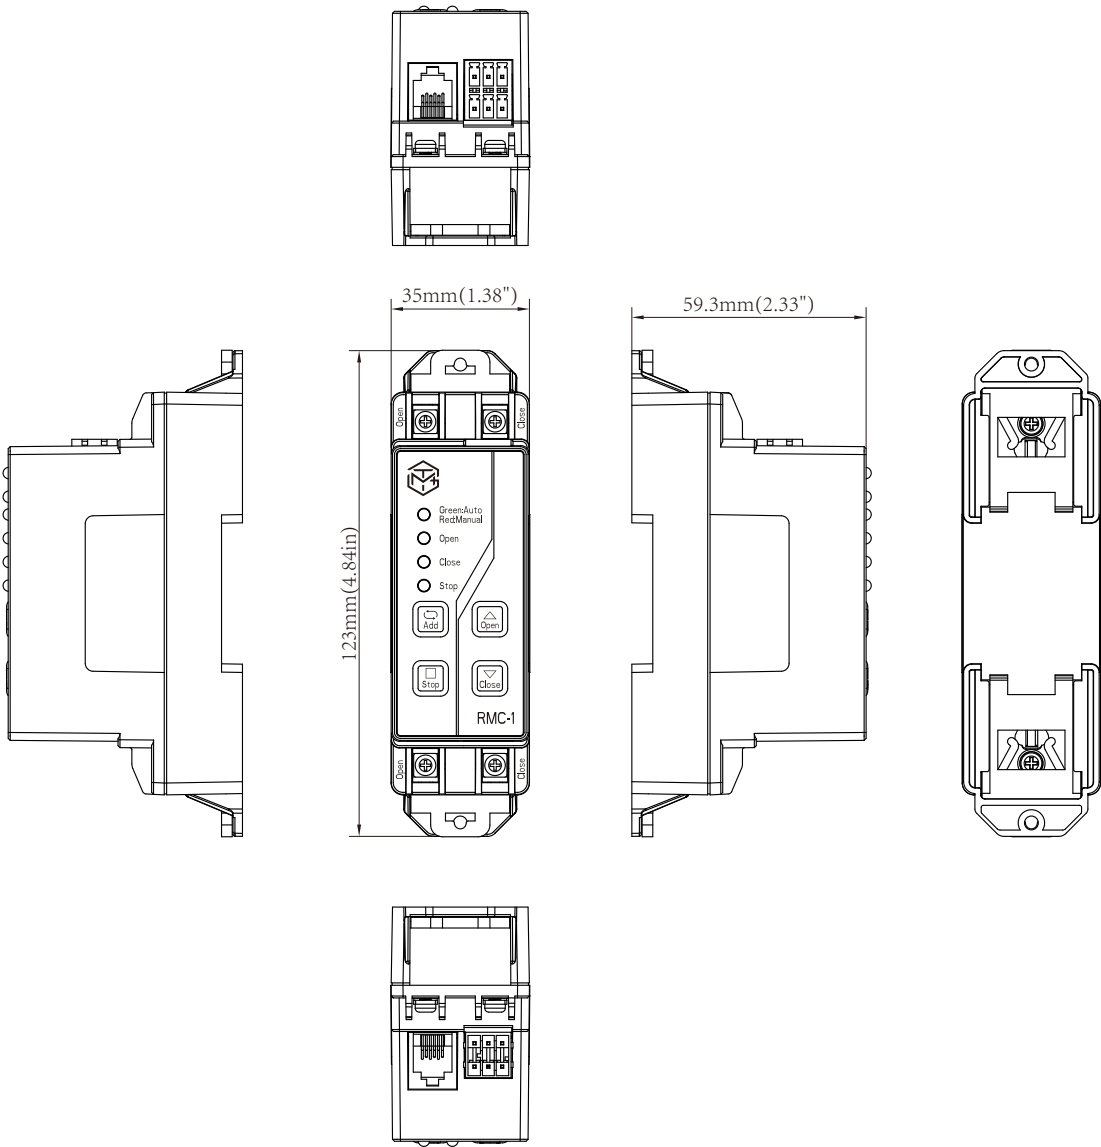

FC RoHS



For more details and to access full information, please click or scan the QR code above.

© 2026 TrolMaster Agro Instruments Co., Ltd. All rights reserved.

Email: support@trolmaster.com

Phone: 877-420-9876