OA6-24

24V Control Board

The OA6-24 control board is designed to control multiple 24vac solenoid valves.

It provides an easy and efficient method to control up to 6 valves … each with individual timer settings. Up to 5 OA6-24 can be connected to a single Aqua-x providing a maximum of 30 individually controlled outputs to connect to your solenoid valves.

The Aqua-x can also provide a “master pump link” by using a DSP-1 along with the OA6-24. Connecting a DSP-1 to the OA6-24 provides an automatic “pump link” between the DSP-1 and the OA6-24. When any of the 24vac irrigation zones are activated on the OA6-24, the DSP-1 will automatically turn on the pump.



Specifications

OA6-24

Input Voltage

Voltage	110-240 VAC

Max Output Current

Voltage/Current	24VAC/0.15A per output

Max Input Current

Holding Current	0.2A
Inrush Current	400ma

Package Dimensions

Size	10.83inch / 275mm(L) x 6.46inch / 164mm(W) x 1.58inch / 40mm(H)
Gross Weight	1.34lbs / 0.61kg

Working Environments

Temperature	32-104°F (0-40°C)
Humidity	≤90%HR


Package Content


24V Control Board	1pc
16ft RJ12 Cable	1pc


Link Up


OA6-24

CONNECTION DIAGRAM

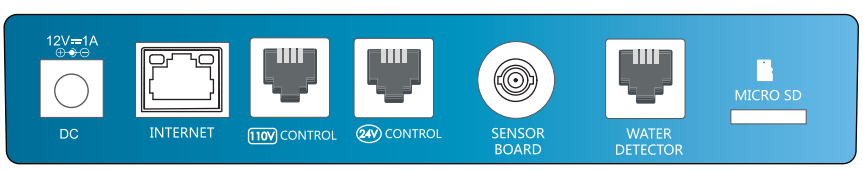

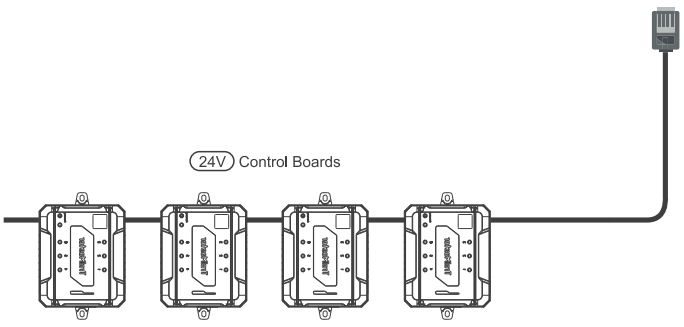

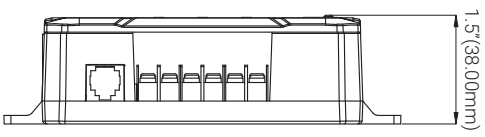

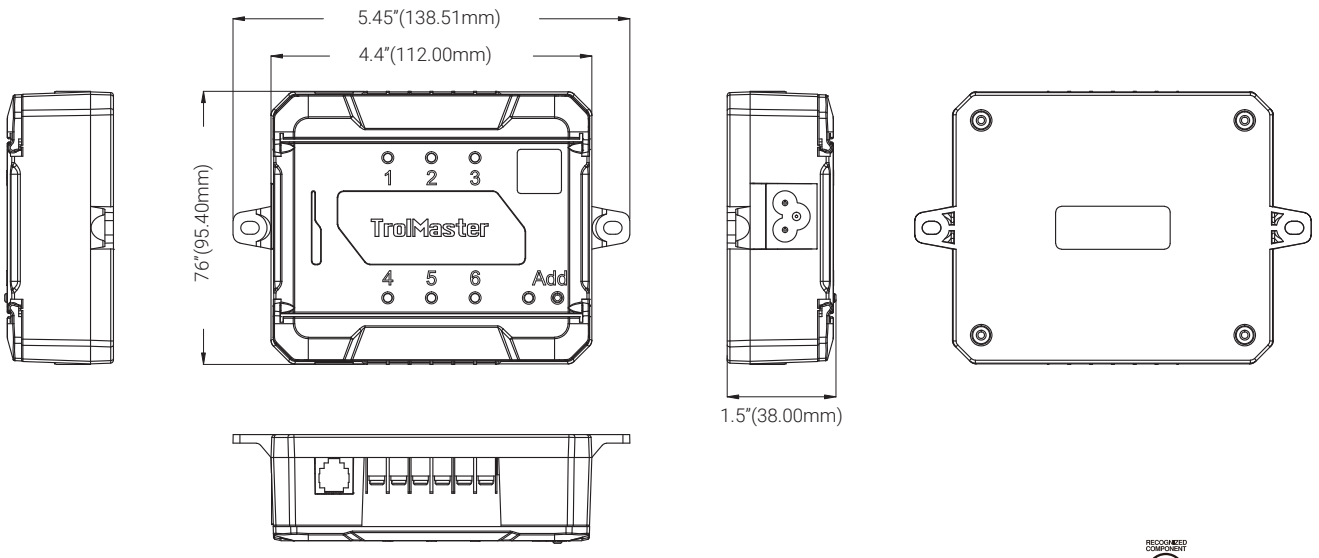

RECOGNIZED COMPONENT c ETL us Intertek 5006191 FC RoHS

TrolMaster

For more details and to access full information, please click or scan the QR code above.

© 2026 TrolMaster Agro Instruments Co., Ltd. All rights reserved.

Email: support@trolmaster.com
Phone: 877-420-9876