TS-2

Thermostat Station

The TS-2 thermostat stations is designed to replace a thermostat connected to a standard HVAC unit. The TS-2 can be used to control most HVAC systems including heat pump and multi-stage HVAC systems. The TS-2 is wired to the HVAC system using the same low-voltage thermostat cable, and has the standard color-coded wiring as most thermostats. The Hydro-x allows separate Day and Night settings for each of up to (4) TS modules, so multiple HVAC systems can be controlled by a single Hydro-X system. The TS-2 also has an adjustable delay time for each HVAC systems being activated. That minimizes high start-up (inrush current) and allows up to 4 HVAC systems to be safely controlled.



Specifications

TS-2

Input Voltage

Input Voltage	12V~

IP Rating

IP Rating	IP20

Maximum Current

Maximum Current	0.1A

Working Environments

Temperature	32~122°F (0~50°C)
Humidity	≤90%RH

Package Dimensions

Size	6.30inch / 160mm(L) x 3.39inch / 86mm(W) x 3.39inch / 86mm(H)
G.W. per pack	0.88lbs / 0.40kg


Package Contents


Thermostat Station	1pc
16ft RJ12 Cable	1pc
4ft RJ12 Cable	1pc
T-shaped Splitter	1pc

Link Up


TS-2

Connection Diagram

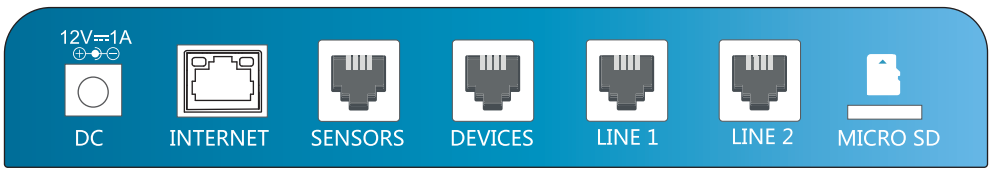

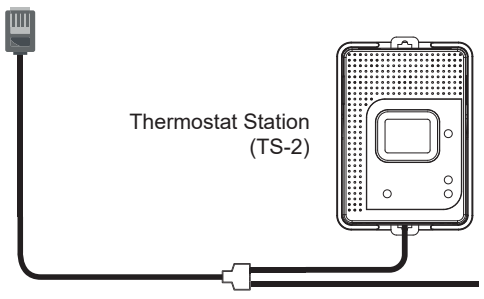

Product Dimensions

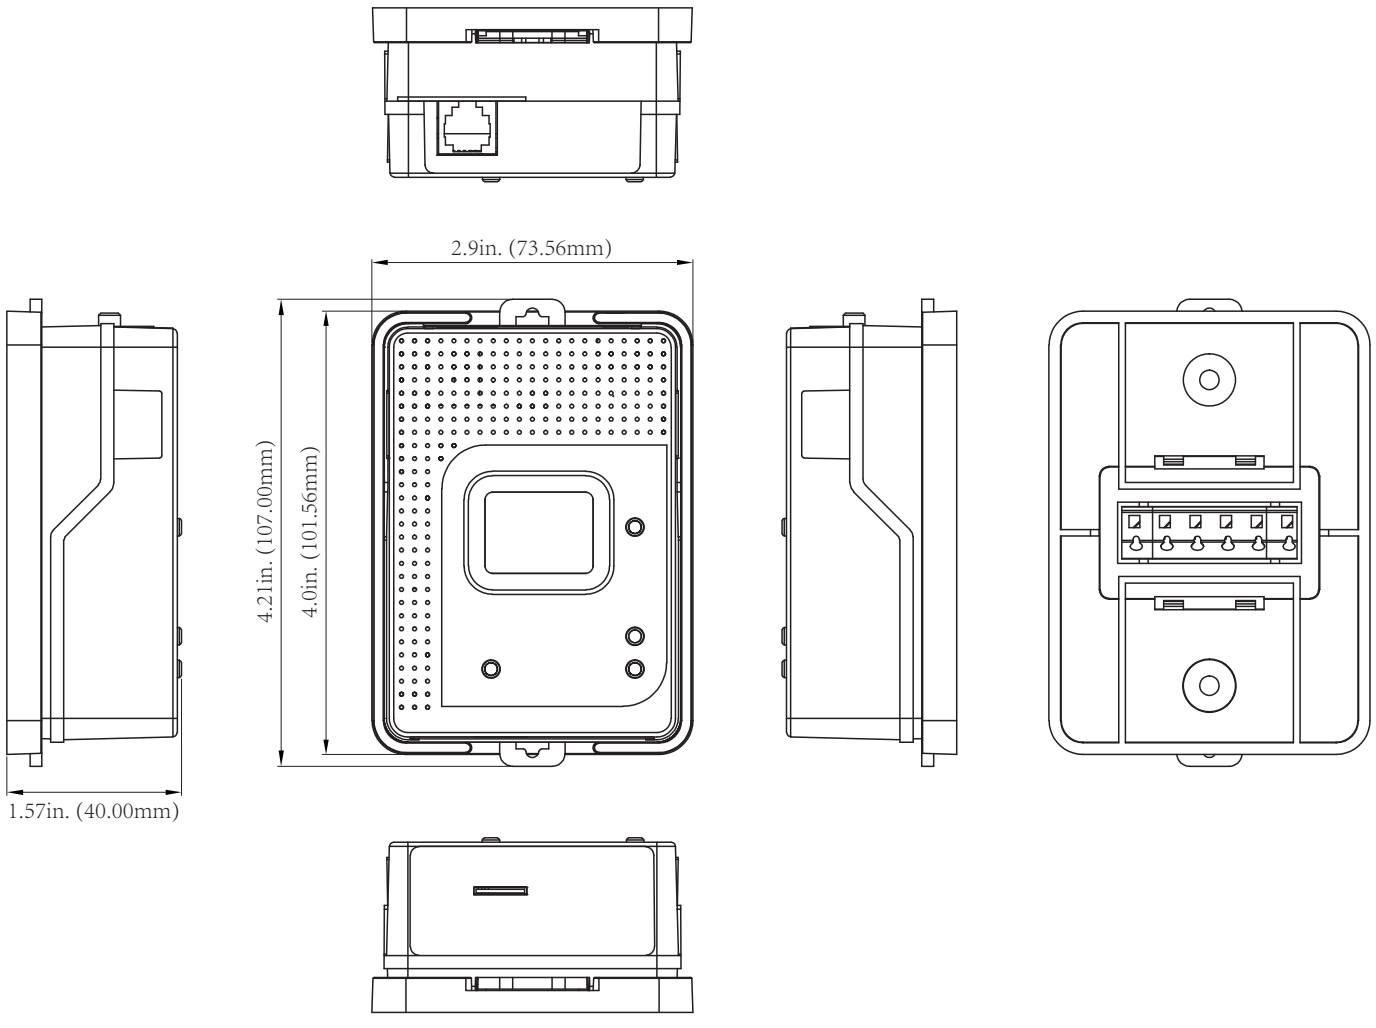

Intertek 5008191

© 2025 TrolMaster Agro Instruments Co., Ltd. All rights reserved.

Email: support@trolmaster.com
Phone: 877-420-9876