

DSD-2

240V Dry Contact Station

The Trolmaster DSD-2 Dry-Contact Station module provides a simple and flexible solution to users who want to connect & control devices to the Hydro-X using a “dry-contact” or relay to activate the device. Some equipment requires either normally open or normally closed contact closure in order to activate the equipment. The DSD-2 is the product that you need to control those types of devices.



**\*Note:** The DSD-2 can be configured to work as the other Trolmaster power modules work. The DSD-2 connects to the “devices” line on the Hydro-X and can control various devices such as Lighting contactors, Light Deprivation curtains, Pump contactors, Temperature devices, Humidity devices, and CO2 devices.

**\*Consult Trolmaster for questions concerning your particular device.**

Specifications

DSD-2

Input Voltage

Input Voltage100-240V~, 50/60Hz

DC Output

DC Output12V / 0.5A

NO/NC

NO/NC6A@250VAC, 6A@30VDC

Working Environments

Temperature32-104°F (0-40°C)

Humidity≤90%

Package Dimensions

Size3.35inch / 85mm (L) x  
3.15inch / 80mm (W) x  
3.54inch / 90mm (H)

Gross Weight11.64oz / 330g

Package Content

Dry Contact Station1pc

16ft RJ12 Cable1pc


4ft RJ 12 Cable1pc

RJ12 T-Splitter1pc








Link Up

DSD-2

CONNECTION DIAGRAM

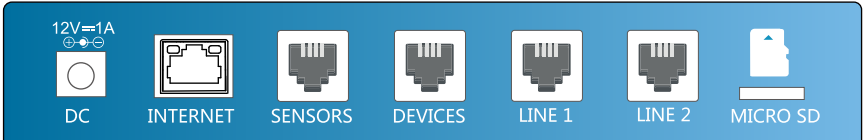

240V Dry Contact Station (DSD-2)

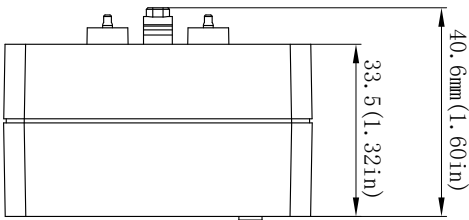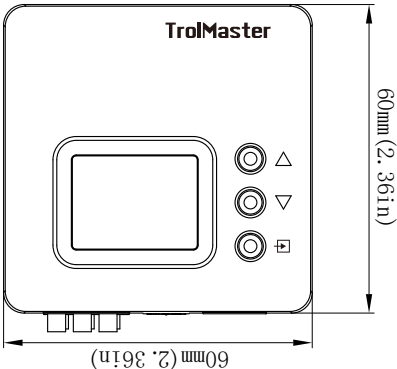

RoHS